Venus® Style

The stylish parasol



Avcıoğlu Anti-Rotation Telescopic System

Our umbrellas are equipped with the **Avcıoğlu-developed Anti-Rotation Telescopic System**. The system consists of a **Ø100 mm outer aluminum profile** and a **Ø80 mm inner profile** that moves telescopically inside it.

The Ø80 mm inner profile features specially designed **anti-rotation channels** that prevent lateral rotation inside the main profile. This ensures telescopic movement occurs only on the vertical axis, eliminating rotation, play, and instability during opening and closing.

Developed through Avcıoğlu's field experience and engineering approach, this system delivers **high durability and mechanical reliability** for heavy-duty use in hotels, cafés, and restaurants.



AVCIOĞLU
UMBRELLA

VENUS® Style

The stylish parasol

Basic model

Frame

- 8 parts made from aluminium
- Anti-rotation mast including reinforcing struts
- Mast profile Ø 100 mm and 5 mm wall thickness
- Roof struts 20 × 40 mm

Frame material

- Aluminium: EN-AW-6063-T66
- Screws and rivets made from stainless steel A4

Opening principle

- Counter-rotating (telescopic system)



The joint where the umbrella's ribs connect is made of stainless steel, ensuring **maximum strength and durability**.

Fixations

More information

Bases / parasol stands / covers

- Ground sockets
- Mounting plates without or with installation height made to measure
- Mounting plates for insulation floors
- Base plates made to measure

Additional options –

Standard accessories

More information

- LED lighting system
- Infrared radiant heater

BUS systems / connection to the home control system

- Rain gutters
- Side walls
- Protective covers with corset lacing
- Strap systems
- Impact protection

Special product solutions – Made to measure


More information

- Special sizes & intermediate measurements (increments 1 & 2)
- Mast extensions & reductions max. + 1000 mm / - 500 mm
- Frame in all RAL colours
- Sahuleda fabric
- Special fabrics (third-party fabrics, PVC & flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

AVCIOĞLU UMBRELLA

VENUS® Style


The stylish parasol

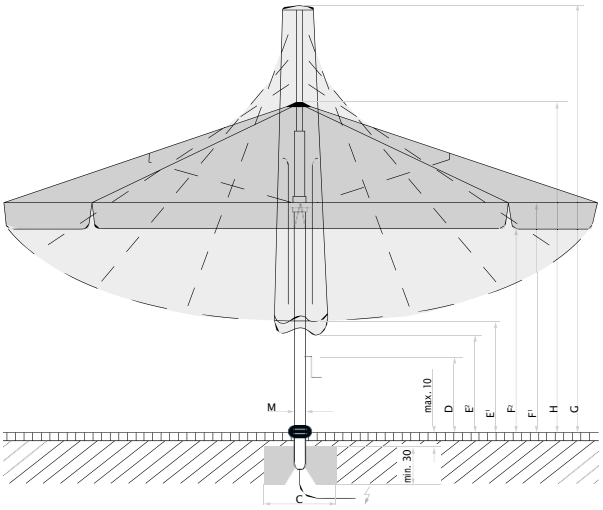


Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage, supply line electric.

LED positions on the Palazzo Style with LED


Radiant heater positions on the Palazzo Style with radiant heater



8 parts




8 parts




8 parts


Nominal size	Lateral distance	Mast Ø	Area covered		Height closed/ with flounce	Clear headroom/ with flounce	Total height	Height open	Foundation	Minimum weight for base
cm	cm	mm	m^2	cm	cm	cm	cm	cm	cm	kg
A	AS	M	B	D	E^1/E^2	F^1/F^2	G	H	C	
250 × 250	–	100	6,25	85	142/117	235/200	386	310	80 × 80	180
300 × 300	–	100	9	85	124/99	235/200	401	317	80 × 80	180
400 × 400	–	100	16	85	121/96	235/200	424	321	80 × 80	240
500 × 500	–	100	25	80	103/78	235/200	445	350	90× 90	240
	–				/					

AVCIOĞLU UMBRELLA

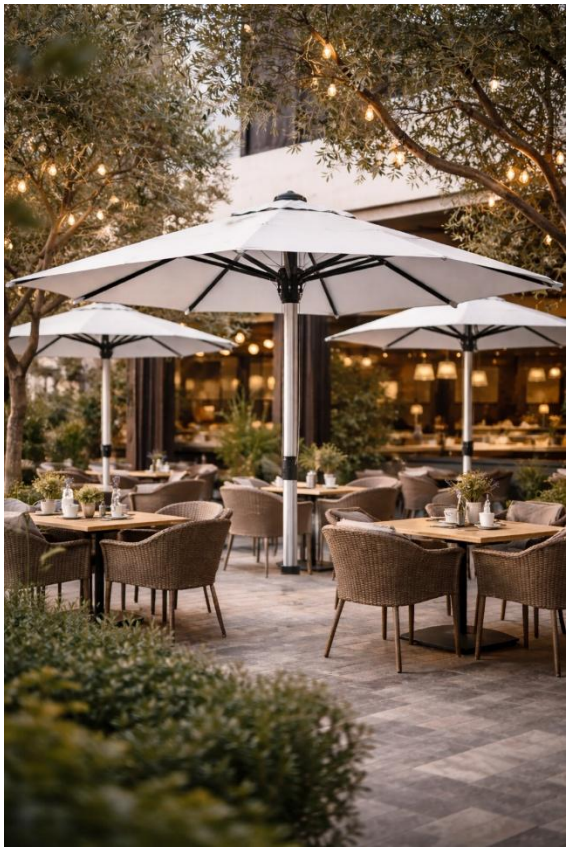



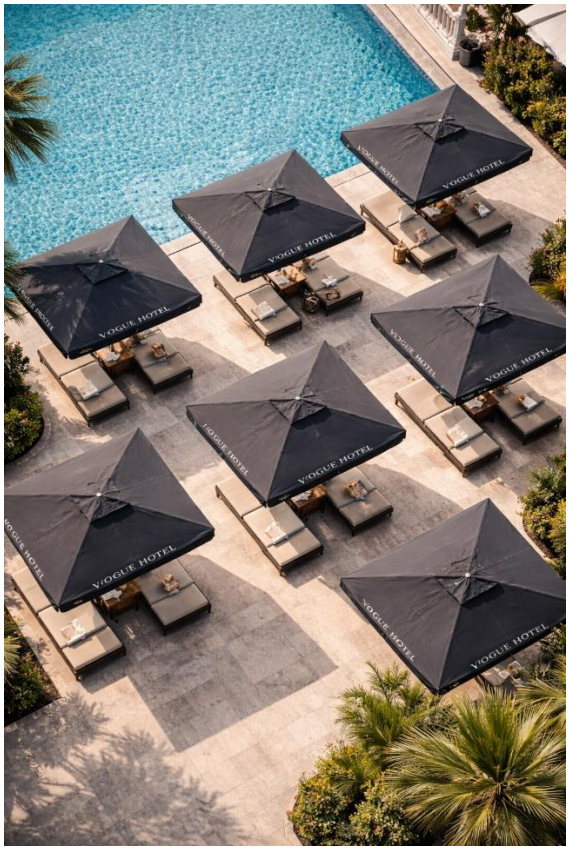

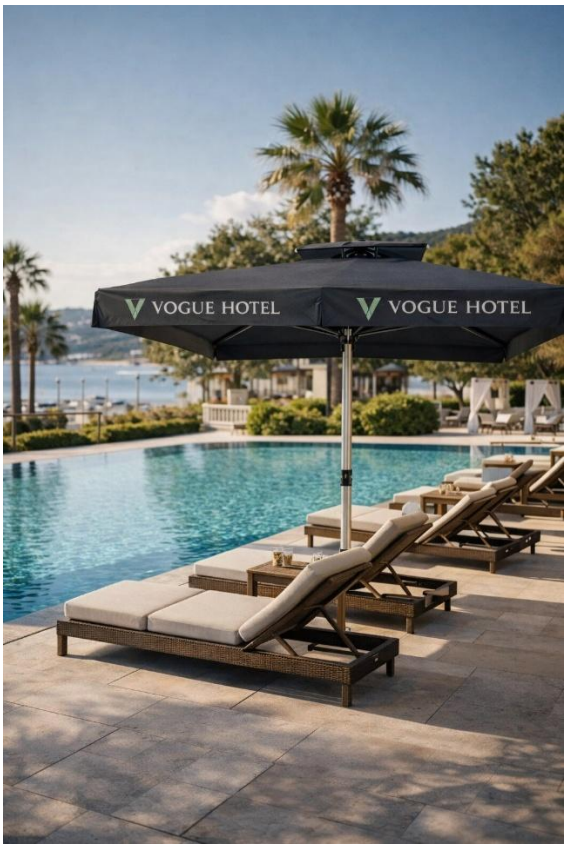

AVCIOĞLU
UMBRELLA